




SAFETY CABINET FOR GAS CYLINDERS


Ventilation system with thermo-fuse




Mounting rails (optional)




Normalized label



Earthing link.



Ramp (optional)



Locking door

▲ 795BG
+ RH795BG
+ RA795BG

RANGE 7.90BG**EN 14470-2 EN 1363-1****CONFORMITY**

- Tested and approved according to EN 14470-2 (04/2006) and EN 1363-1 (06/2000).
- Normalized labelling according to ISO 3864, and EN 14470-2 norms, and 92/58/CEE European directive.

ADVANTAGES


- Tested and approved with ISO 834 fire heating curve by an independent European laboratory.

PASSIVE SECURITY

- Double Wall construction:
 - Outer housing made of sheet steel.
 - Inner body built in melamine-based wood.
- Thermal insulation panel between the walls avoiding thermal bridges.
- Epoxy white RAL 9010.
- Normalized labelling.
- Earthing link.

ACTIVE SECURITY

- Ventilation outlet Ø 100 mm connecting pieces for possible exhaust.
- Thermo-expanding seals of the door allow keeping the internal body fireproof.
- In case of fire, a thermo-fuse automatically seals off the ventilation system.

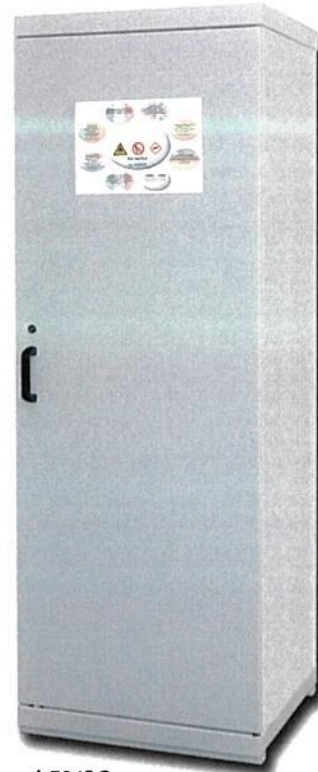

^ 794BG

All models are delivered without interior equipment. They have, therefore, to be equipped with rails for supporting the gas cylinders, and access ramp...

To protect the users health and to improve the life cycle of your safety cabinet, we recommend to install an exhausting system. Do not hesitate to contact-us for more information.

**Cooling system**

To increase the security of your cabinet and control the temperature inside, we propose you a cooling system. Ask-us for more information.



Reference	Description	External Dim. H x W x D (mm)	Internal Dim. H x W x D (mm)	B50 cylinder storage capacity	Recommended equipment	Weight (kg)
794BG	Tall cabinet 1 door	2075 x 705 x 615	1855 x 565 x 410	2	1	300
RH794BG	Horizontal rail for mounting 2 cylinders B50	-	-	-	1	2
795BG	Tall cabinet 2 doors	2075 x 1260 x 615	1855 x 1120 x 410	4	1	410
RH795BG	Horizontal rail for mounting 4 cylinders B50	-	-	-	1	3
RA794BG	Ramp for 794BG or 795BG	-	-	-	1	10

Flammable
cabinetsCorrosive
cabinetsToxic cabinets
and multiriskPesticide
rangeFume hoods, filtering
cabinets - VentilationRetention
and CansAnti-fire equipments
and Files cabinets

The manufacturer keeps the right to modify technical characteristics without notice. 01/2014